

LINSY 林氏家居

安装示意图 Assembly Instruction

产品名称 Product name	LS176G5-B/C/D衣帽架 Standing coat rack	产品规格 Product specification	1040*423*1600
----------------------	--	-------------------------------	---------------


五金表 Hardware list

编号 NO.	名称 Name	图示 Picture	数量 QTY
A	内六角平圆头机丝-1/4"×50 Hexagonal flat round head screw		2
B	内六角平圆头机丝-1/4"×32 Hexagonal flat round head screw		4
C	内六角斜边机丝-M6×20 Hexagon socket countersunk head screw		8
D	垫片 PVC gasket		2
E	夹板母 Splint nut		8
F	镀锌锌六角匙 Allen Key		2

部件表 Parts List

编号 NO.	名称 Name	规格 Specification	数量 QTY	材质 Material
1	层架 Bottom layer rack	744*430*28	1	实木 Solid wood
2	内外框右脚 Right under bar	830*33*20	2	实木 Solid wood
3	内外框左脚 Left under bar	830*33*20	2	实木 Solid wood
4	内框上脚 Inside upper bar	830*33*20	2	实木 Solid wood
5	外框右上脚 Outer frame right upper bar	830*33*20	1	实木 Solid wood
6	外框左上脚 Outer frame left upper bar	830*33*20	1	实木 Solid wood
7	小挂棒 hanging rod	70*24*24	4	实木 Solid wood
8	短圆管 Short tube	817*25*25	2	五金 Hardware
9	长圆管 Long tube	860*25*25	1	五金 Hardware

效果图
Picture




安装工具 Tool



安装人员 Installer


1. 安装前请仔细阅读安装示意图。
Read the installation diagram carefully before installation.
2. 将编号为5与2,4与2,4与3,6与3的配件分别用C、E锁紧。
Lock the parts No. 5 and 2,4 and 2,4 and 3,6 and 3 with C and E respectively.

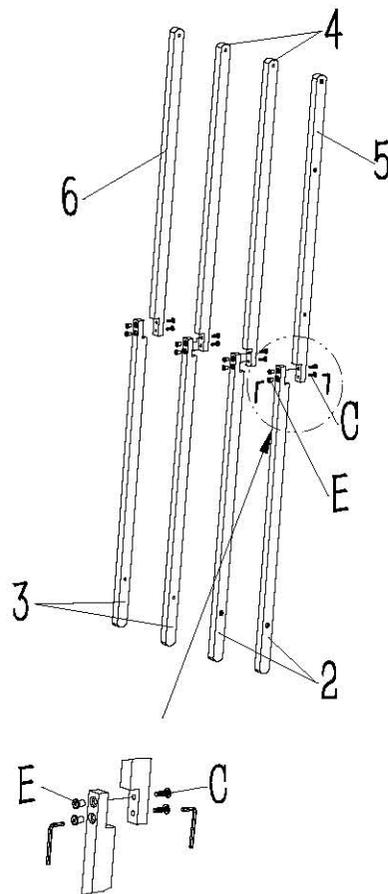

注意：此处需同时用两个六角匙锁紧。
Note: Use two Allen keys at the same time.

①

3. 整体安装时，脚条所有大孔一致朝外。
When the whole installation, all the big holes of the under bars shall be outwards.
4. 所有螺丝只扭进螺母70%，待底部平稳后，再全部扭紧。
Only twist 70% of all screws into the nuts, and then tighten all screws after the bottom is stable.
5. 扭挂棒无需螺母，请稍用力扭紧即可。
No nuts are needed to twist the hanging rods, please tighten it slightly.

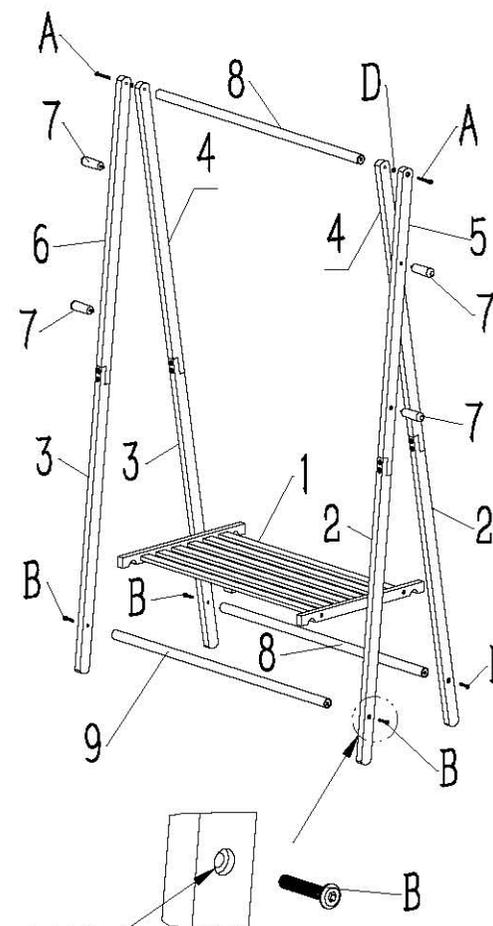

大孔朝外
The big hole shall be outwards.

②

LINSY 林氏家居

安装工具 Tool



安装人员 Installer



安装示意图 Assembly Instruction

产品名称 LS176G2-B/C/D衣帽架 产品规格 800*450*1550
Product name Standing coat rack Product specification


五金表 Hardware list

编号 NO.	名称 Name	图示 Picture	数量 QTY
A	万向轮无刹-φ40,M6*15 Wheel with brake		2
B	万向轮有刹-φ40,M6*15 Wheel without brake		2
C	内六角平圆头机丝-1/4"×32 Hexagonal flat round head screw		2
D	内六角平圆头机丝-1/4"×50 Hexagonal flat round head screw		8
E	内六角斜边机丝-M6*20 Hexagon inner beveled screw		8
F	内六角斜边机丝-M6*25 Hexagon inner beveled screw		4
G	螺母-1/4"×φ10*13 Nut		8
H	内六角斜边夹板母-φ13*12 M6 Hexagon inner beveled splint nut		8
I	六角匙-4MM Allen key		2
J	开口扳手-11# Wrench		1

部件表 Parts List

编号 NO.	名称 Name	规格 Specification	数量 QTY	材质 Material
5	右上前立条 Right upper forward bar	783*33*20	1	实木 Solid wood
6	右上后立条 Right upper back bar	783*33*20	1	实木 Solid wood
7	右下前立条 Right under forward bar	783*33*20	1	实木 Solid wood
8	右下后立条 Right under back bar	783*33*20	1	实木 Solid wood
9	顶横圆管 Top tube	760*25*25	1	五金 Metals
10	上层板 The upper board	760*343*27	1	实木 Solid wood
11	底层板 The lower board	760*428*27	1	实木 Solid wood
12	挂棒 Hanging rod	70*24*24	4	实木 Solid wood



效果图

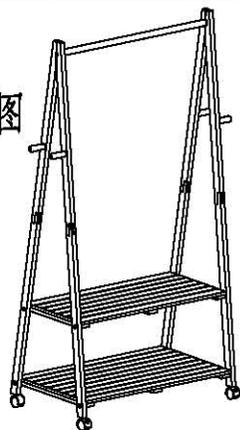

部件表 Parts List

编号 NO.	名称 Name	规格 Specification	数量 QTY	材质 Material
1	左上前立条 Left upper forward bar	783*33*20	1	实木 Solid wood
2	左上后立条 Left upper back bar	783*33*20	1	实木 Solid wood
3	左下前立条 Left under forward bar	783*33*20	1	实木 Solid wood
4	左下后立条 Left under back bar	783*33*20	1	实木 Solid wood

① 1. 所有螺丝只扭进螺母70%，待底部平稳后，再全部扭紧。
Only twist 70% of all screws into the nuts, and then tighten all screws after the bottom is stable.

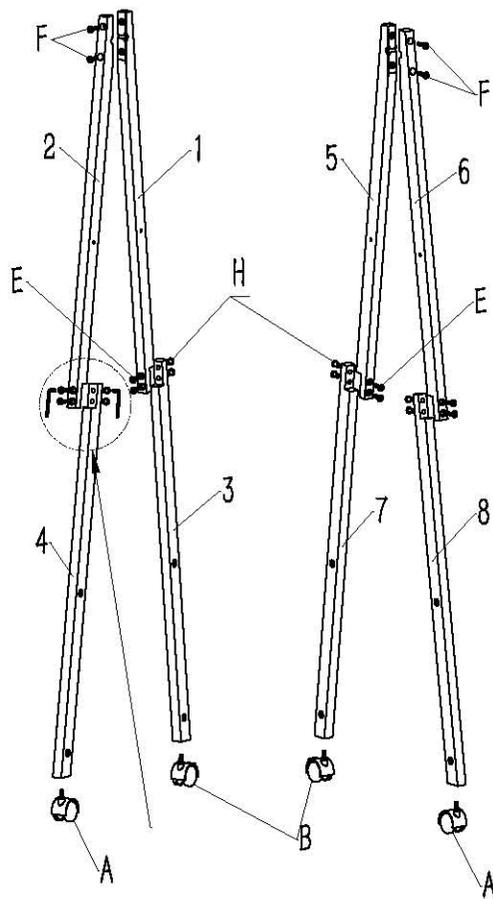

注意：此处需同时用两个六角匙锁紧。
Note: Use two Allen keys at the same time.

② 2. 扭挂棒无需螺母，请稍用力扭紧即可。
No nuts are needed to twist the hanging rods, please tighten it slightly.

